



## **HIGH BAY LED LANZAROTE**

### **PROFESSIONAL LIGHTING**

LANZAROTE is the ideal solution for overhead lighting of any space, from a work area to a complete industrial warehouse.



## HIGH BAY LED LANZAROTE 150 - 170LM/W



PROFESSIONAL  
LED SPOTLIGHTS  
WITH WIDE  
POWER RANGE.  
MAXIMUM  
EFFICIENCY



SOSEN driver and Lumileds LED  
are used for LANZAROTE0 series  
hood


With strict quality control, 5 years  
warranty, and a brightness of more  
than 90% is guaranteed after 5 years.

# HIGH BAY CHARACTERISTICS



- » EASY INSTALLATION
- » POSITION ANGLE
- » GREAT RESISTANCE

## » POWERS

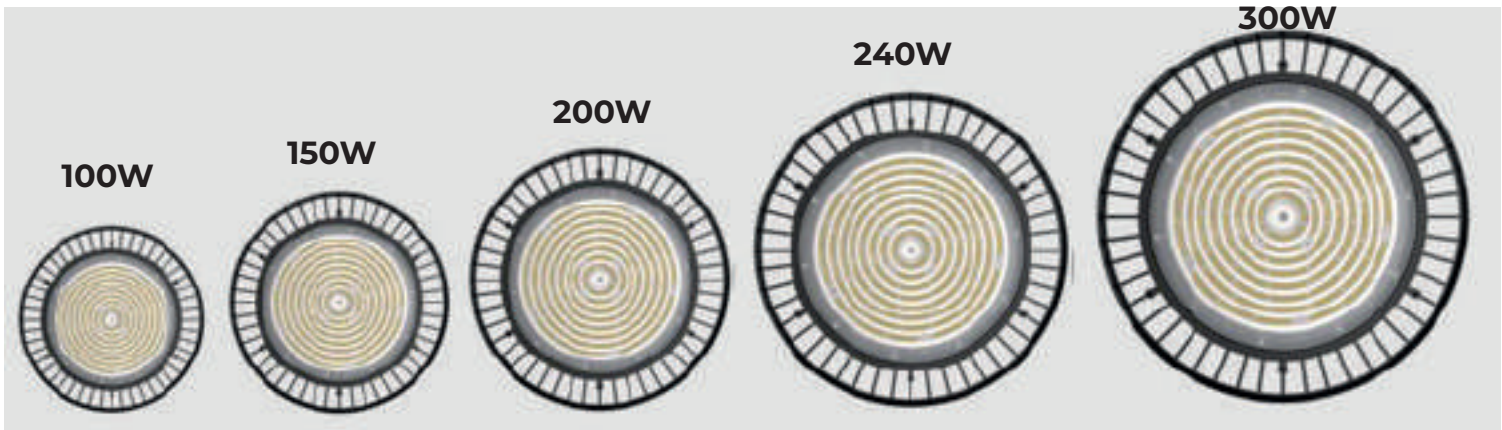

ANGLE: 60° / 90° / 120°



Lumileds LED

DRIVER SOSEN

150  
170  
Lm/W

3 YEAR



LEGAL WARRANTY


5 YEARS  
WARRANTY BY OPTIMALED



INSTALLING A COMBI  
OVERVOLTAGE PROTECTOR

# TECHNICAL SPECIFICATIONS

- Housing: Die-cast Aluminum
- Conductivity: 96 W/m-K
- LED: Lumileds LED
- CRI: Ra>80
- SDCM: <6
- Power factor: >0.95
- THD: <15
- DRIVER: SOSEN
- Driver efficiency: >93 %
- Protection: OTP, OCP, OVP, SCP
- Surge protection 4KV~6KV
- Waterproof: IP65
- Impact proof: IK08
- Operating temperature: -40-60 °C
- TM21: L90B10>50,000H
- Flicker Free


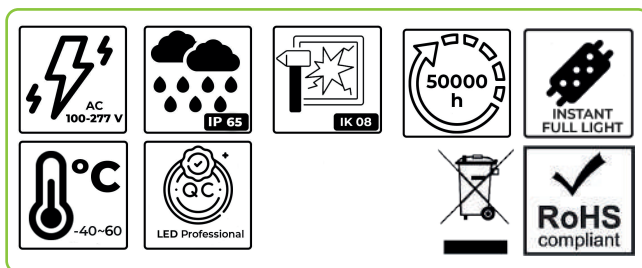


## EXTRAS CUSTOM MANUFACTURING



MODEL	W	V	Lumenes	CRI	IP	DIMENSIONS
LNZ100-100-5K	100W	220~240V	15000LM	>80 (90)	IP65	D255.0*H162.0MM
LNZ150-100-5K	150W	220~240V	22500LM	>80 (90)	IP65	D255.0*H162.0MM
LNZ200-100-5K	200W	220~240V	30000LM	>80 (90)	IP65	D300.0*H176.0MM
LNZ240-100-5K	240W	220~240V	36000LM	>80 (90)	IP65	D365.0*H176.0MM
LNZ300-100-5K	300W	220~240V	51000LM	>80 (90)	IP65	D384.5*H181.5MM

## OPTICAL OPTIONS

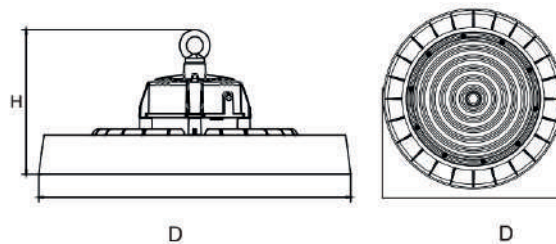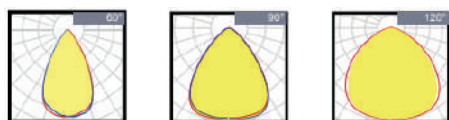

+34 916357859



# OptimaLED<sup>®</sup> ProTour<sup>®</sup>

LIGHTING EVOLUTION

“

LEADING THE  
WAY TO A BRIGHT  
FUTURE

”



[WWW.OPTIMALED.EU](http://WWW.OPTIMALED.EU)

C/ Geológicas, 62  
28923 Madrid - Spain

Teléfono  
+34916357859

